

Setting up a unified 100m bathymetry model for the French coastal areas

- methodology and innovative outcomes -

<u>N. Jeannée</u> , O. Lemarchand	(GEOVARIANCES)
B. Loubrieu, J.F. Bourillet	(IFREMER Géosciences Marines)
E. Moussat	(IFREMER SISMER)
J. Populus	(IFREMER DYNECO)
J.C. Le Gac, G. Morvan	(SHOM)

Contact: Mail: jeannee@geovariances.com
Tel: +33 (0)1 60 74 74 54 – Mob: +33 (0)6 84 04 35 41



Geovariances
Where no one has gone before



Ifremer

Contents

- Introduction
- Input data
- Methodology and Results
 - Bathymetry modeling
 - Overview of by-products (DTM quality, acquisition year, ...)
- Conclusions and Perspectives



Introduction

• Context

- Importance of bathymetry models for numerous oceanographic projects
- For each specific project, bathymetry is usually modeled using available data: SHOM bathymetric database (BDDBS), port authorities datasets, multi-beam datasets acquired during bathymetry surveys, already existing high-resolution bathymetry models...

⇒ **Several drawbacks:**

- Inconsistency between data QC procedures, modeling algorithms and characteristics of bathymetry products,**
- Loss of efficiency and information when the same area need to be modeled again for another project...**

• Objective

Set up a unified bathymetry model at 100m which ensures, for the French coastal zones, the consistency of both:


- data processing, merge and modeling procedures,
- bathymetry products delivered for a whole region.



Input Data

- **Bathymetric Data**


- SHOM Soundings (BDBS)

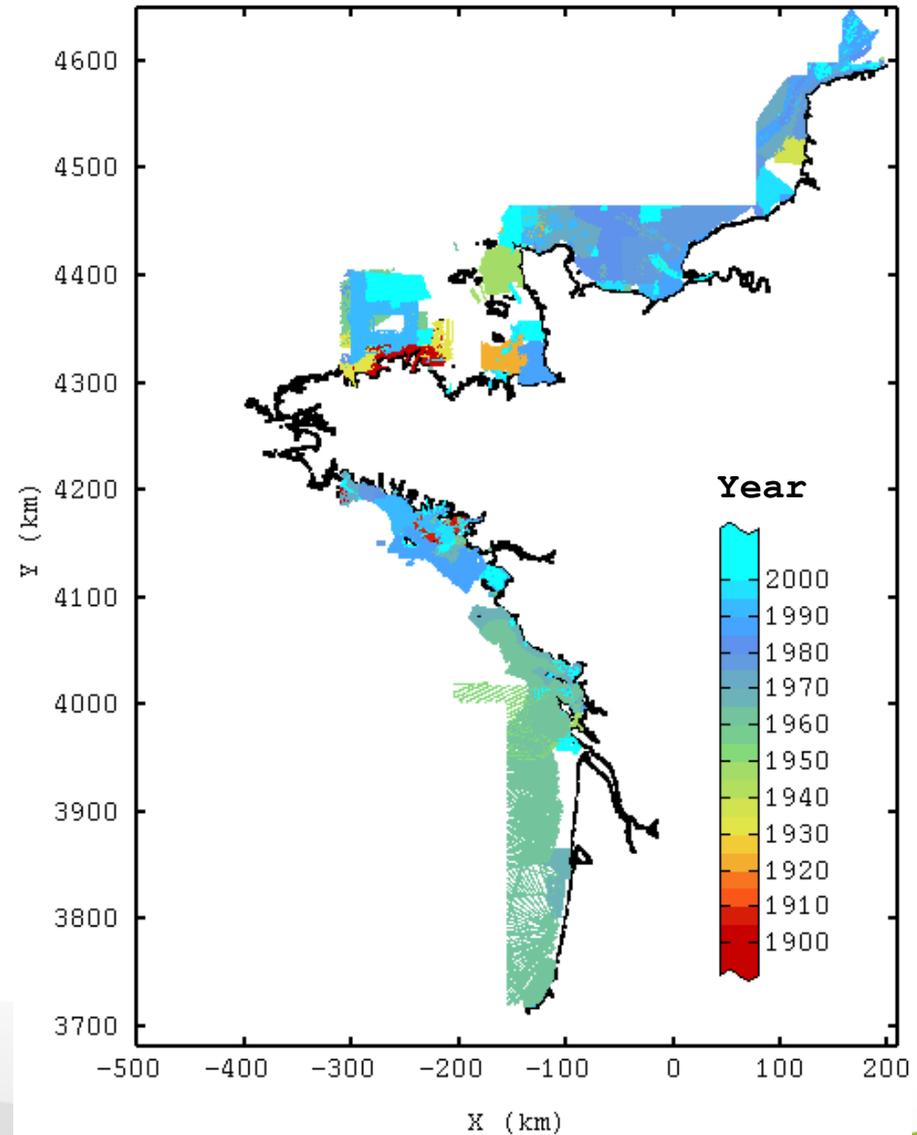

Input Data

• Bathymetric Data


- SHOM Soundings (BDBS)
- Other sources
 - o Bordeaux
 - o Various SHOM data
 - o Dunkerque
 - o SHOM Iroise 100m
 - o RouenLeHavre
 - o StNazaire

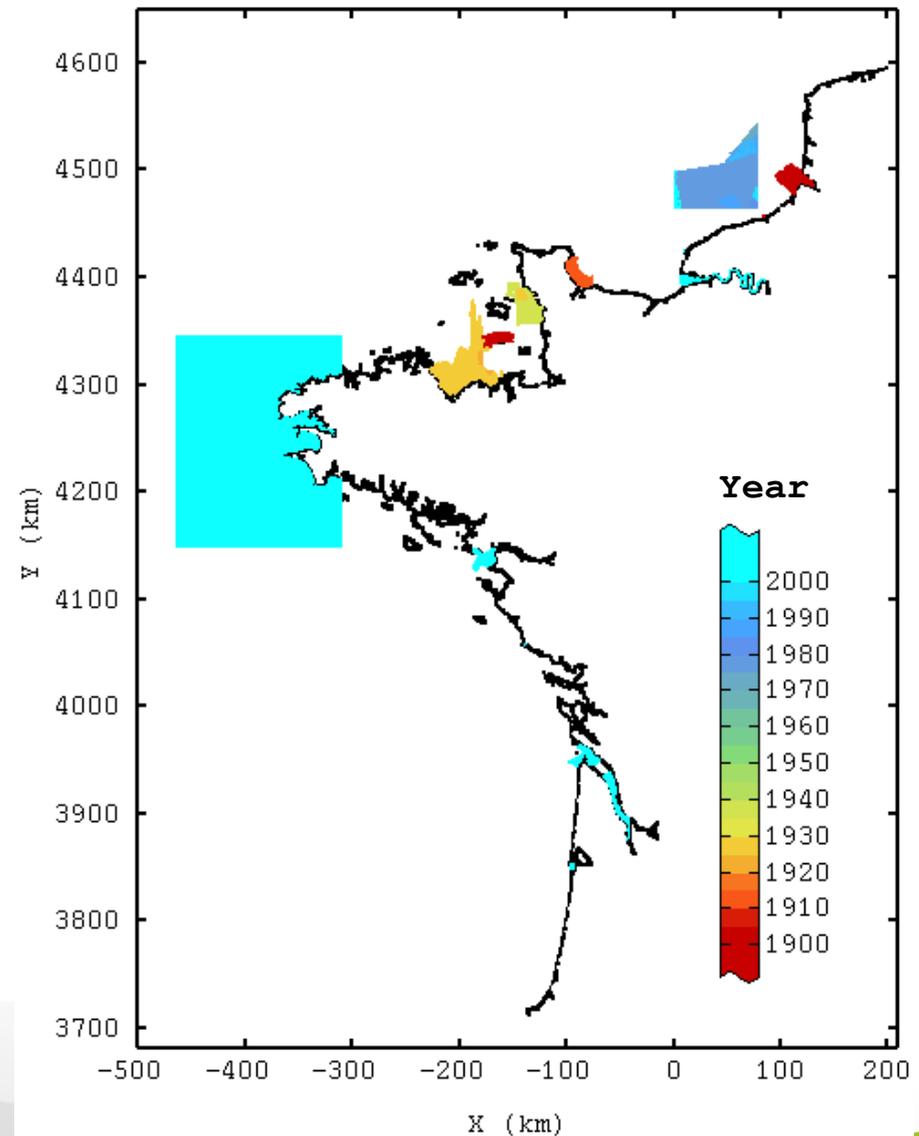

Input Data

• Bathymetric Data


- SHOM Soundings (BDBS)
- Other sources
 - o Bordeaux
 - o Various SHOM data
 - o Dunkerque
 - o SHOM Iroise 100m
 - o RouenLeHavre
 - o StNazaire
- Local DTM models
 - o Mont St Michel (100m)
 - o Lannion bay (5m)
 - o Douarnenez bay (10m)
 - o Capbreton Canyon (40m)

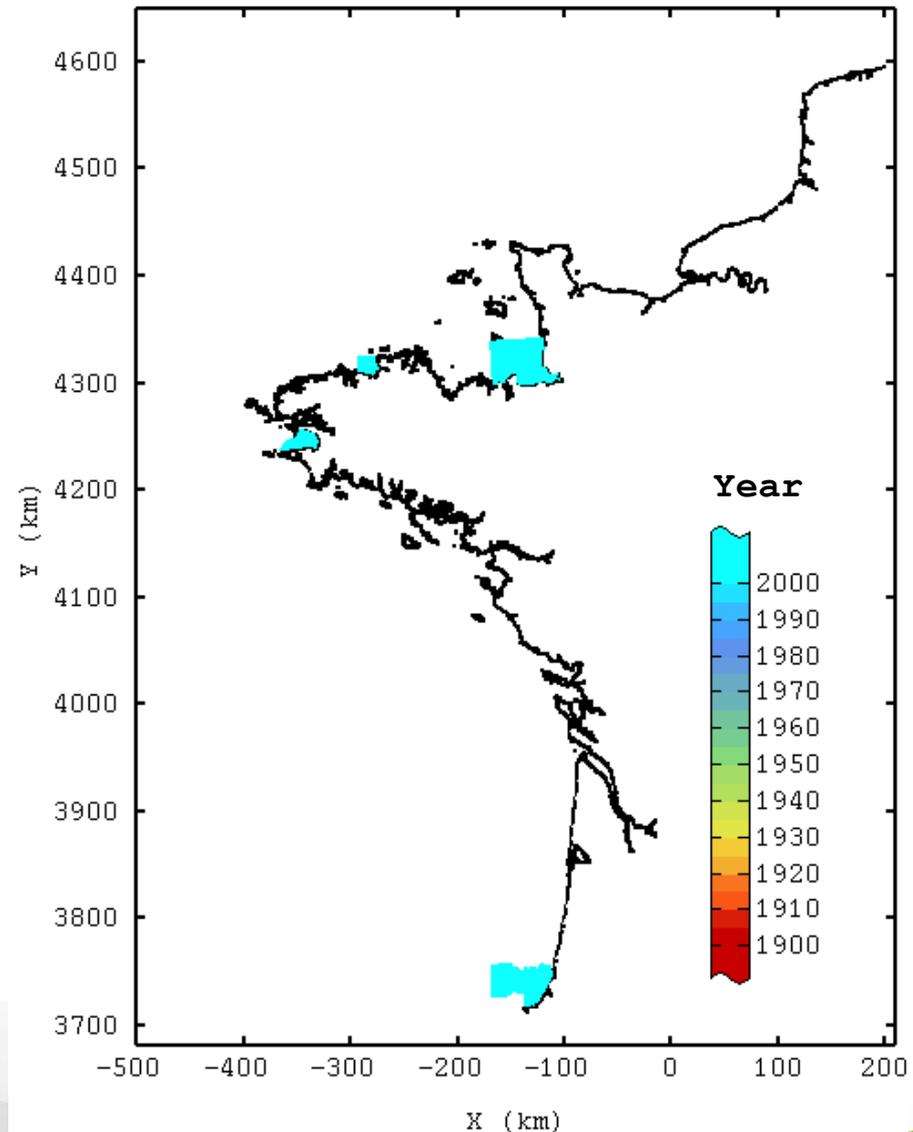

Input Data

• Bathymetric Data


- SHOM Soundings (BDDBS)
- Other sources
 - o Bordeaux
 - o Various SHOM data
 - o Dunkerque
 - o SHOM Iroise 100m
 - o RouenLeHavre
 - o StNazaire
- Local DTM models
 - o Mont St Michel (100m)
 - o Lannion bay (5m)
 - o Douarnenez bay (10m)
 - o Capbreton Canyon (40m)

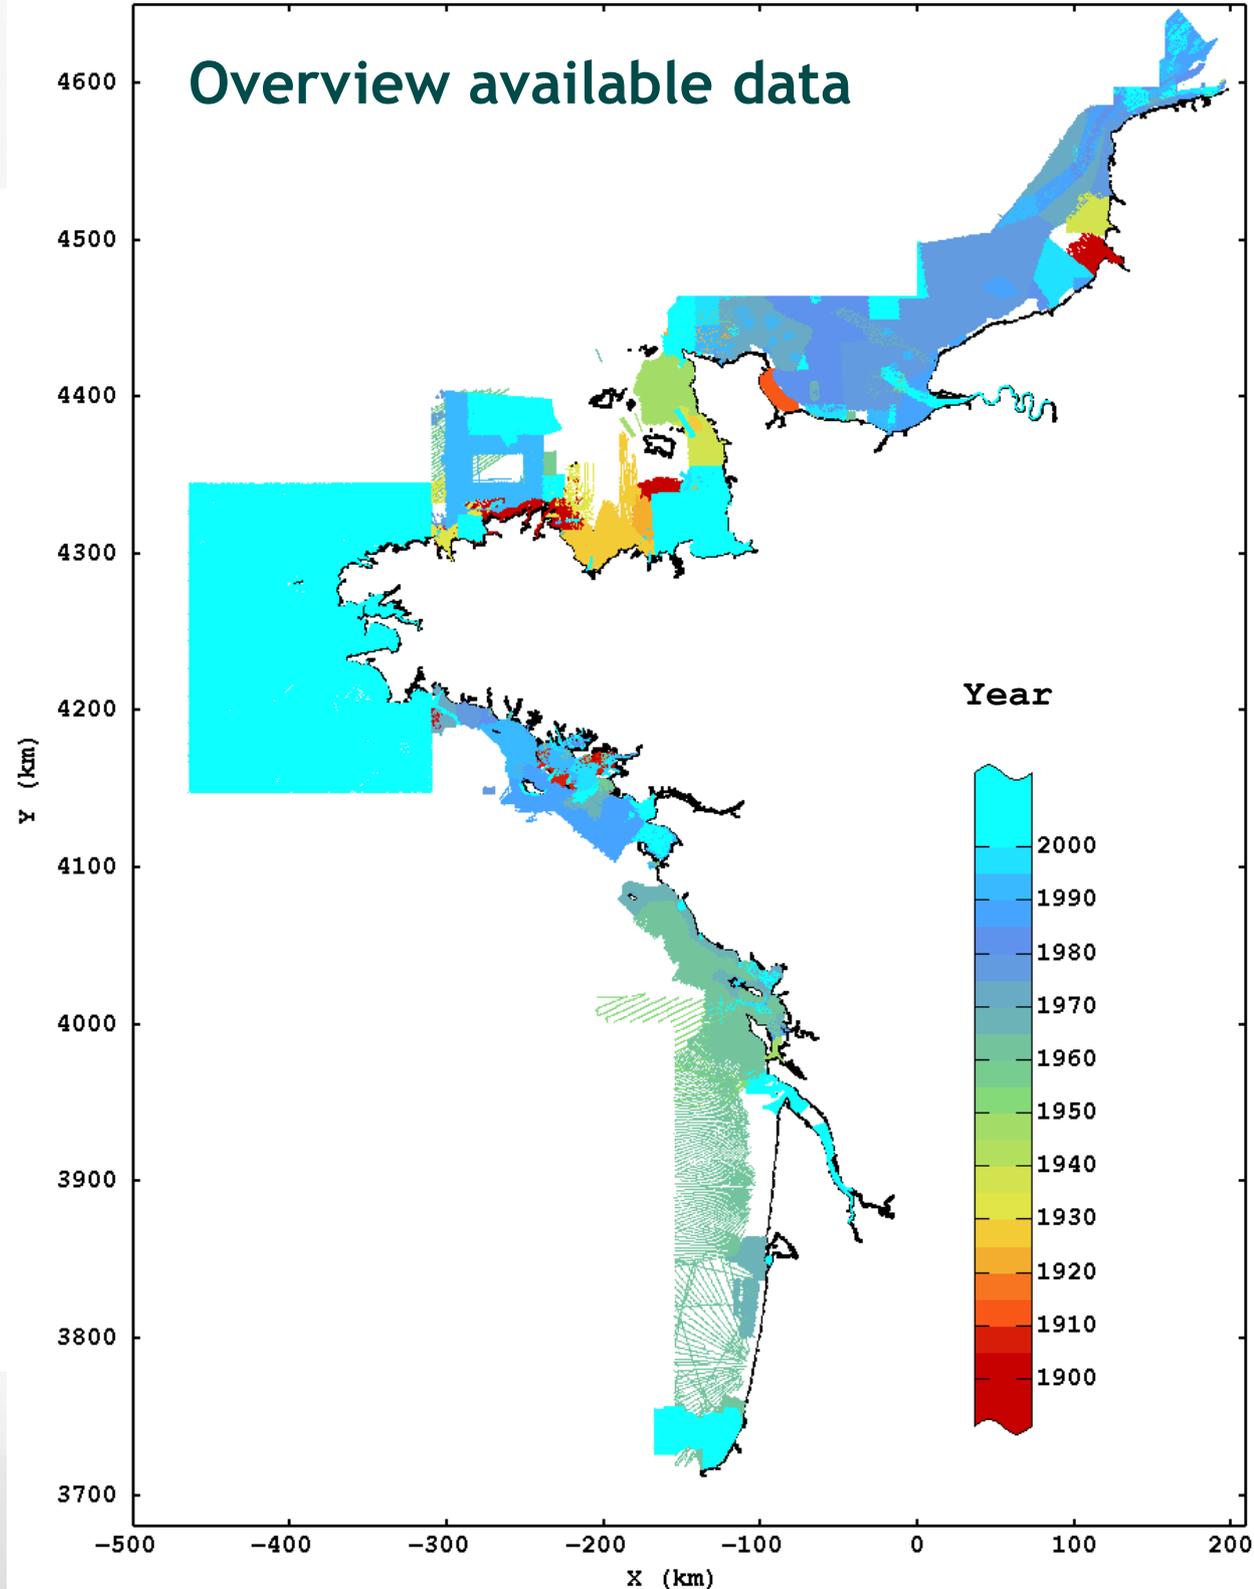

Input Data

- Auxiliary data : coast line and isobaths

- Coast line (black) and isobath 50m (green): frontiers for data interpolation near the coast and towards the open sea
- Height of the water at the maximum of the highest tide at coast line (SHOM software) potentially used to constrain data interpolation near the coast
- Isobath zero (ZeroCM - IFREMER/SHOM) used for comparison with the DTM model

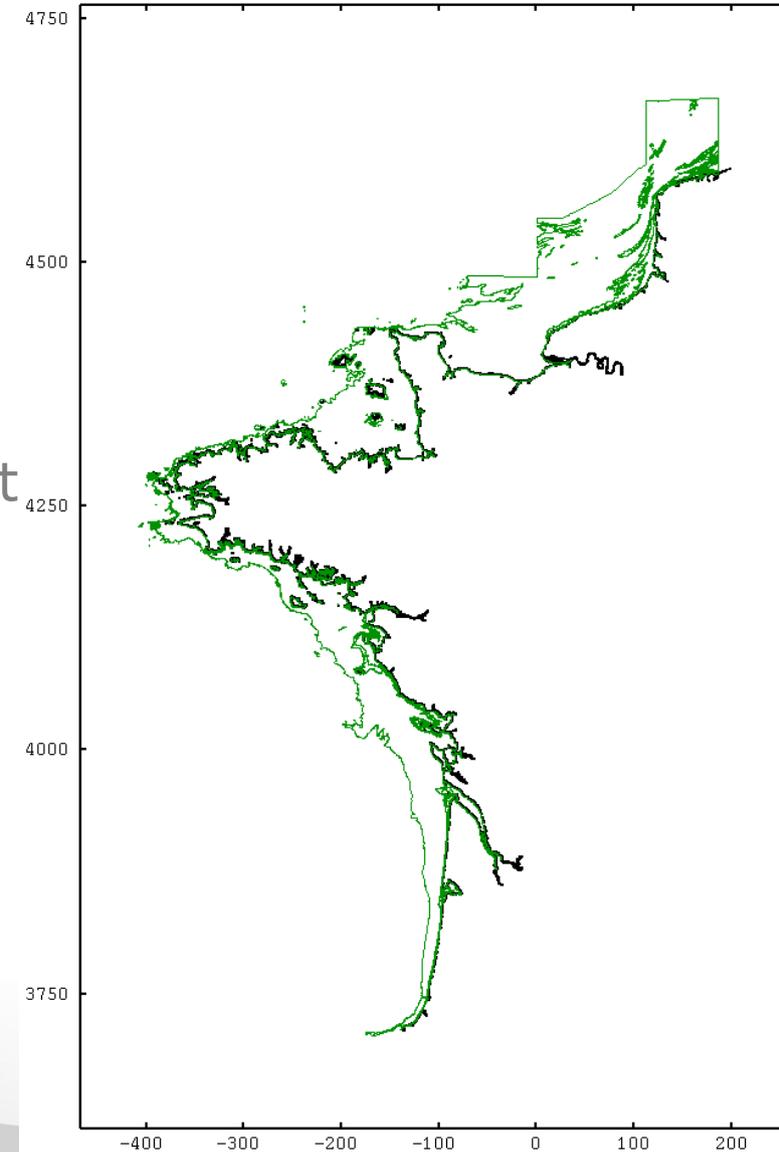

Methodology

- Pre-processing

- Choice of a projection system: Mercator N46
- Automation of data import (journal files)
- Acquisition year extraction from the survey number (SHOM) or datafile names (other sources)

- Data Quality Control

- Redundancy and consistency of various bathymetry datasets:
 - Consistency checked in overlapping areas (scatter diagrams, comparison of short range variability...)
 - Application of several priority criteria:
 - spatial area covered by the dataset (the wider the better),
 - acquisition year (the younger the better),
 - data origin (SHOM)
 - Mixing of both manual and automatic procedures
- Transmission of information about erroneous data to the SHOM
- Merge of remaining files and tiles





Methodology

- **Bathymetry modeling methodology:**
 - Geostatistical framework (flexibility, possibility to quantify DTM uncertainty)
 - On two representative tiles, comparison of several modeling techniques:
 - ordinary kriging with default or fitted variogram,
 - FAI-k kriging (fitting of local trends).
- **Choice of the most relevant approach based on several criteria:**
 - Visual quality control of DTM (empirical)
 - Use of a validation dataset (50% of data) not used for the DTM computation
 - Comparison to multi-beam high resolution models (Lannion)
- **Most relevant approach:**
 - Kriging with linear model and small nugget component
 - Neighborhood choice:
 - Octants, 2 neighbors per octant (max. number of consecutive empty octants allowed: 3)
 - Neighborhood size: 250m, min. number of neighbors: 4





Bathymetry Model: Results

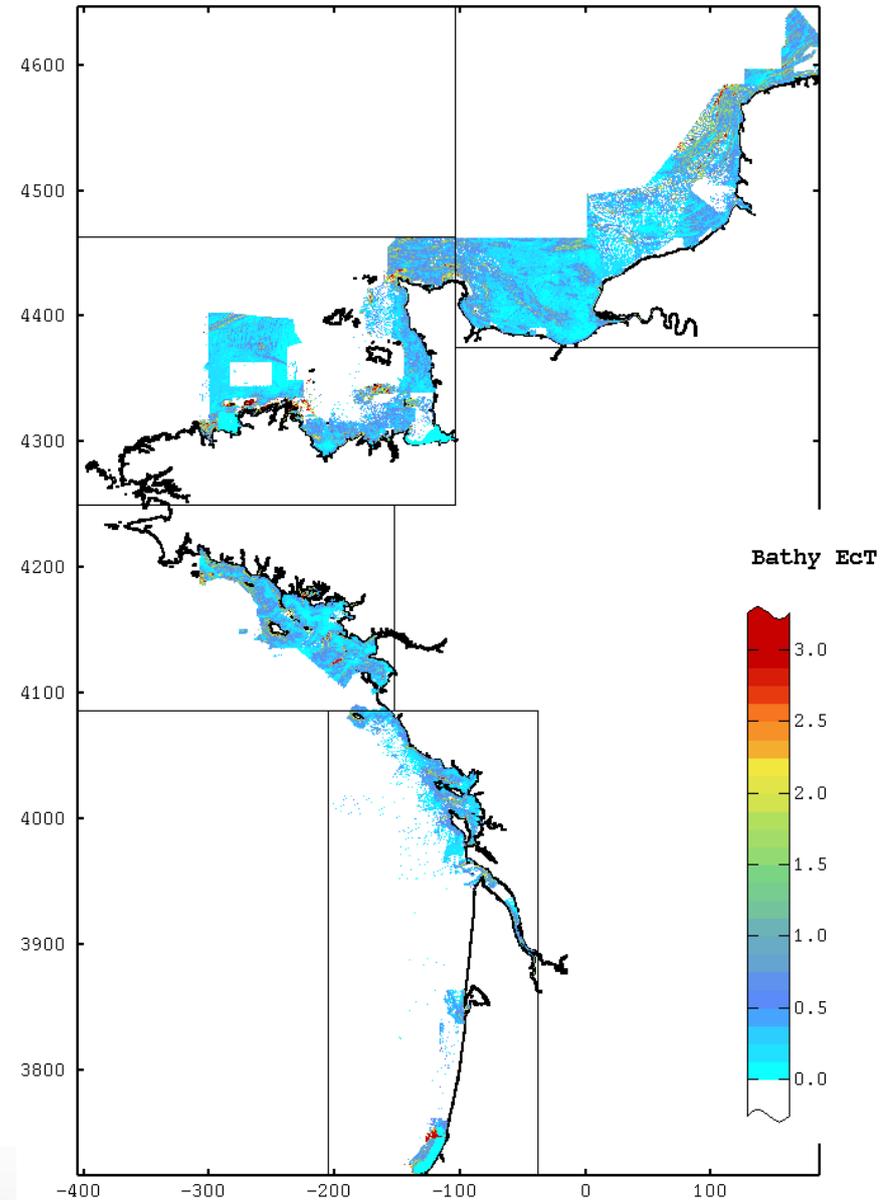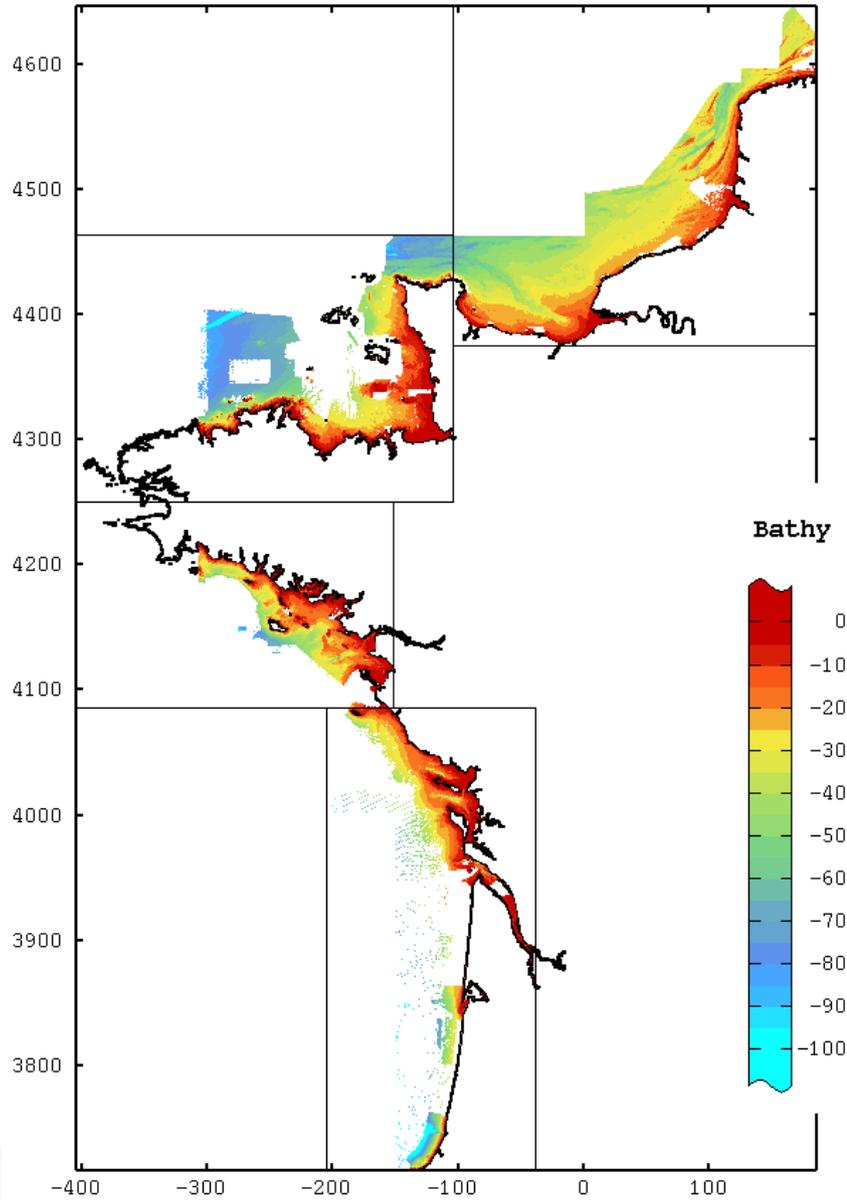


Bathymetry Model: Results

- Filling towards the open sea: DTM 500m (IFREMER)

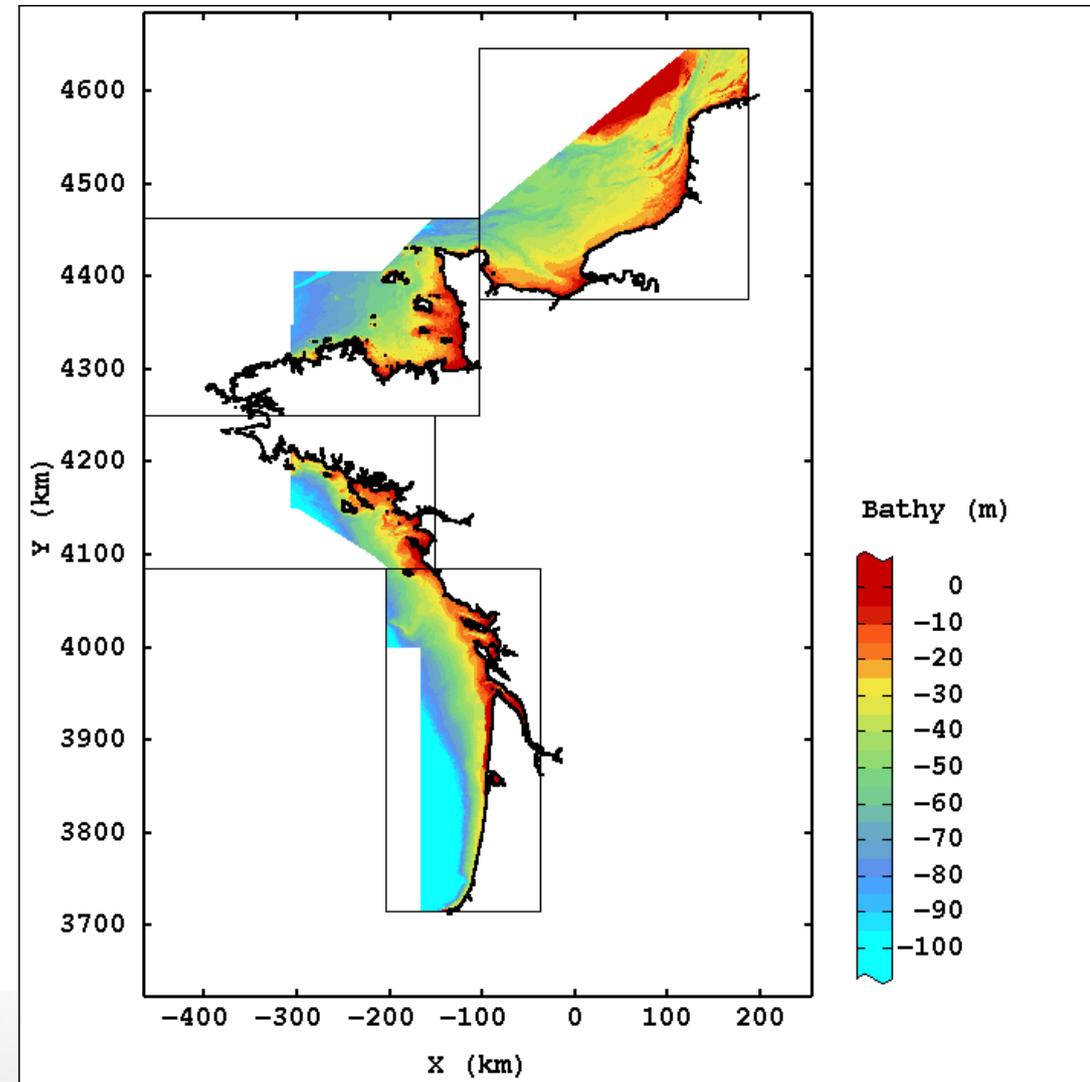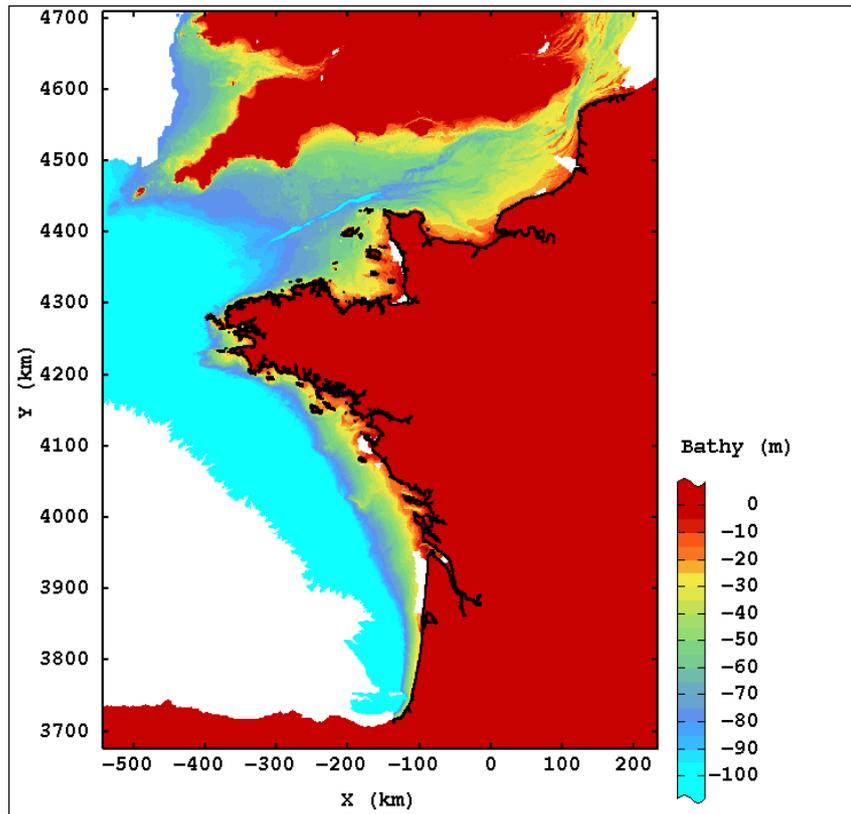


Bathymetry Model: Results

- English Channel
 - Undersea dunes
 - Artefacts in the East

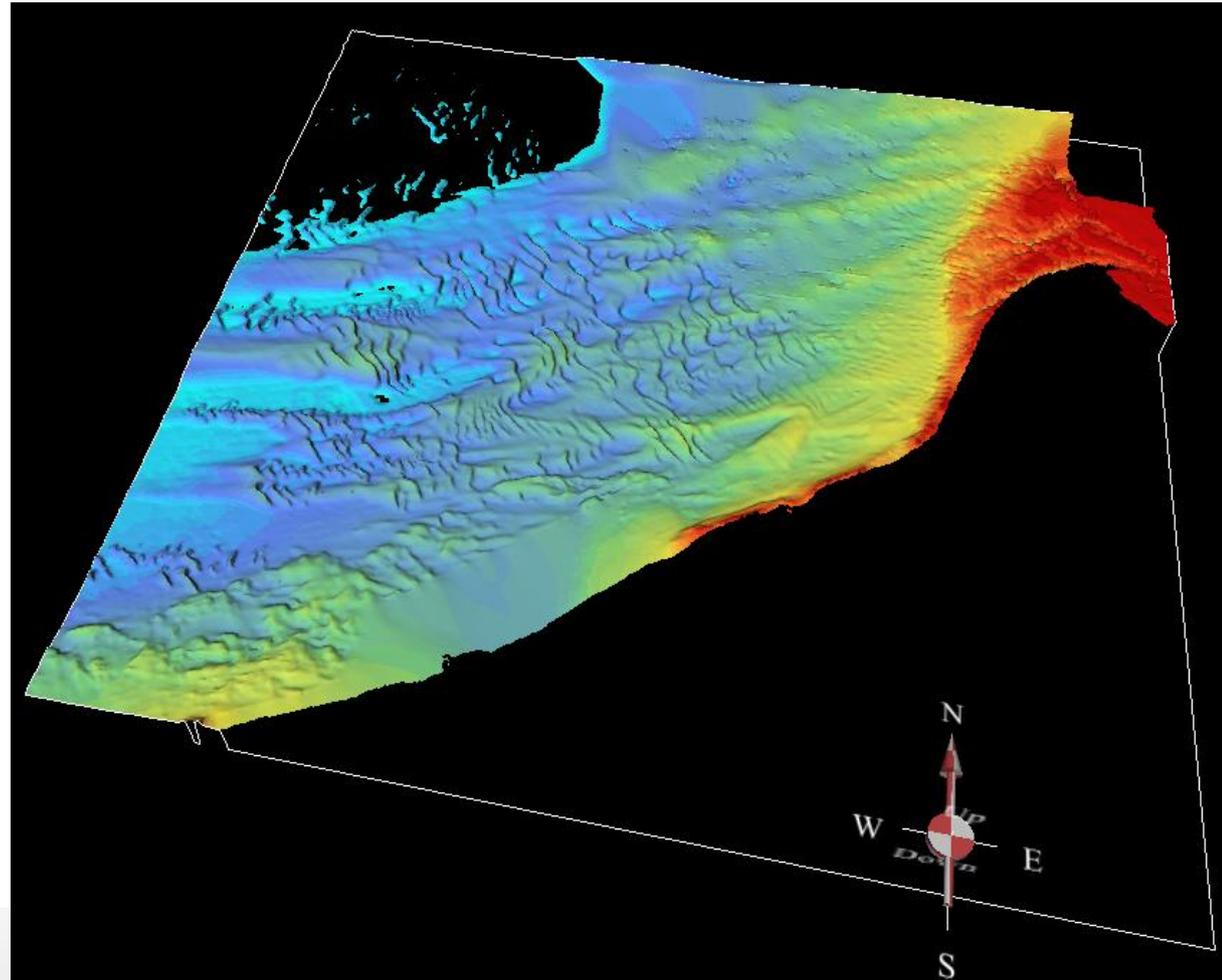

Bathymetry Model: Results


- Southern Brittany

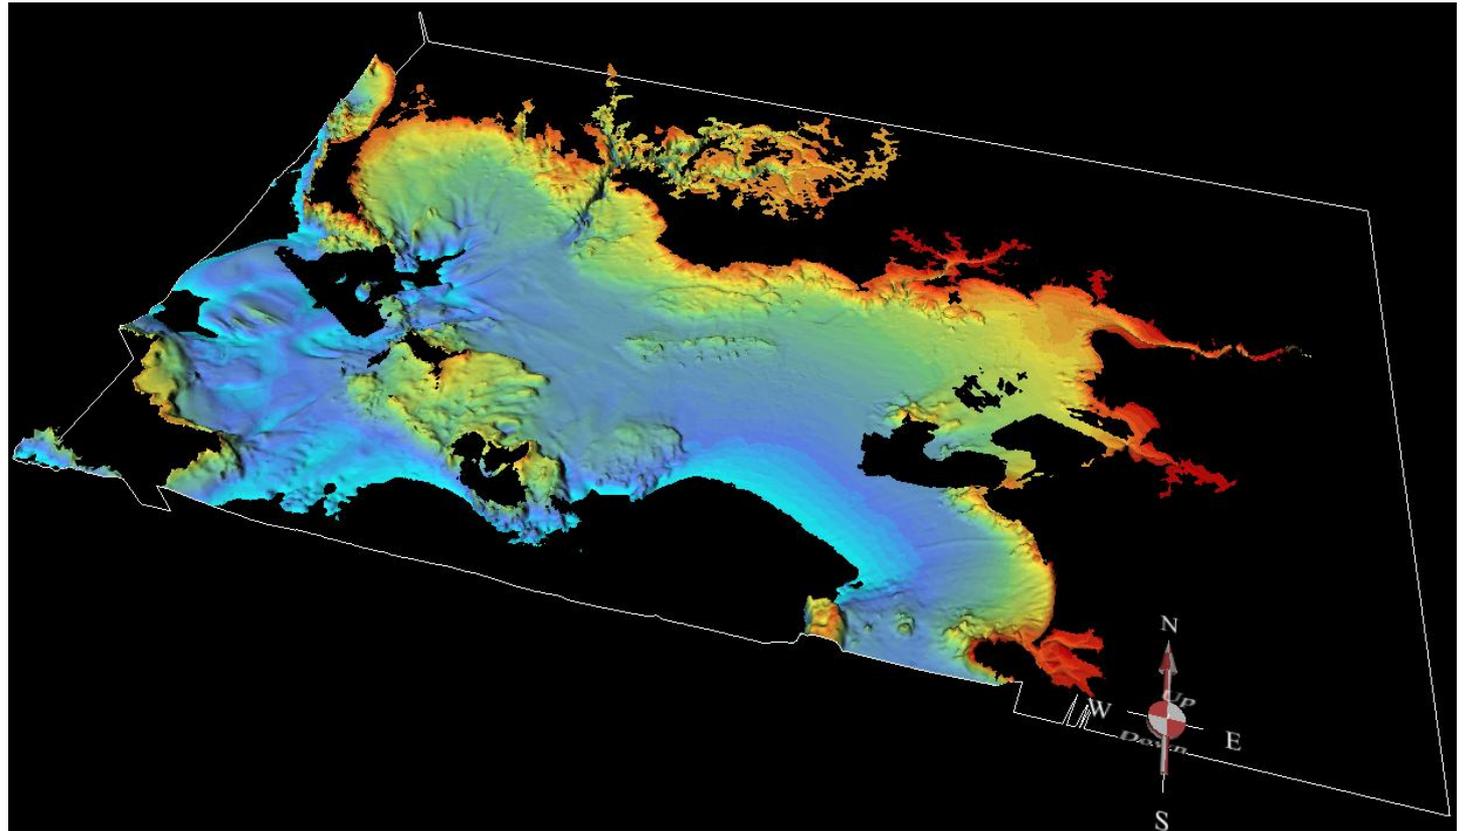

Bathymetry Model: Results


- **Quality control of results**

- Good consistency of DTM isobath 0m with the reference ZeroCM, except in under-sampled areas

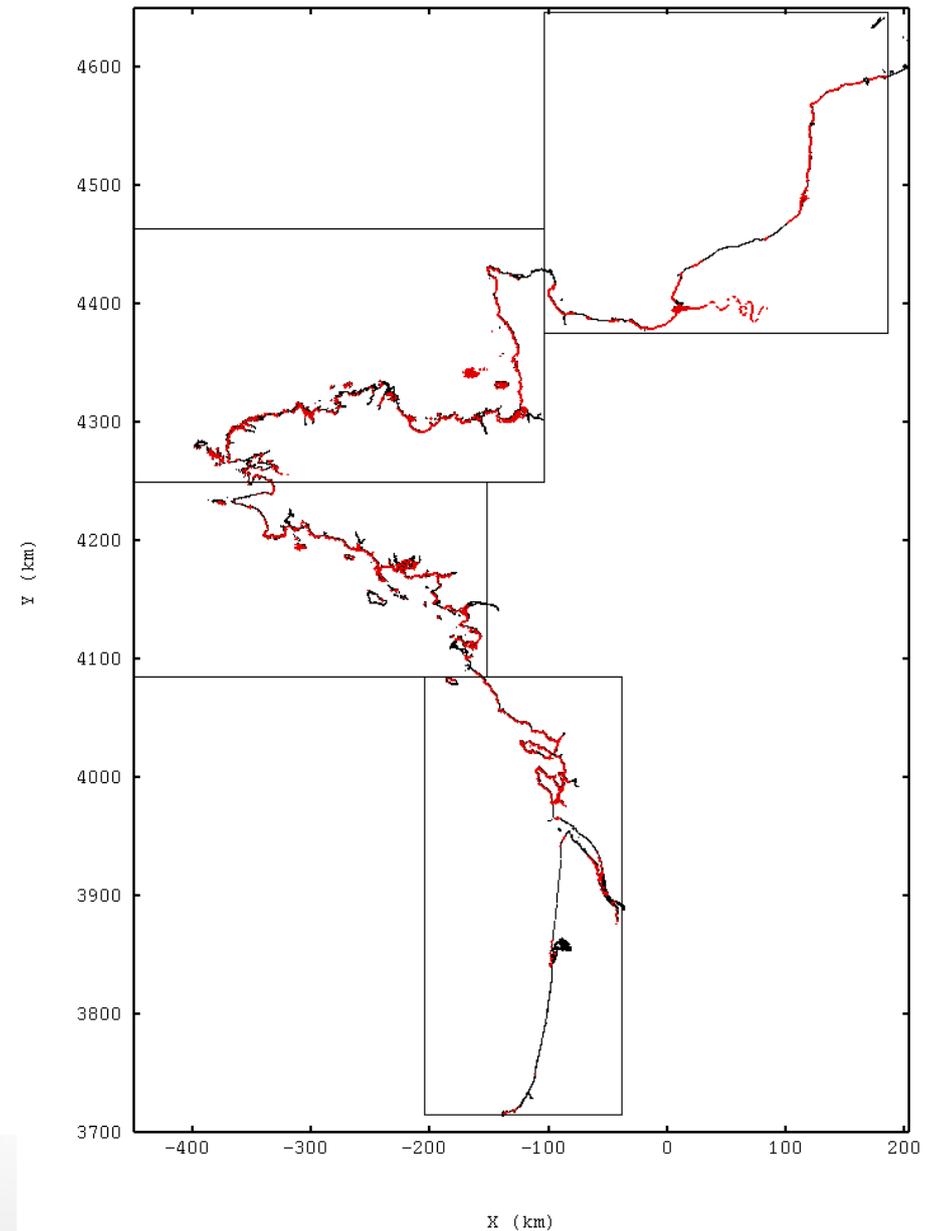

Bathymetry Model: Results

- Quality control of results: Gironde river's mouth

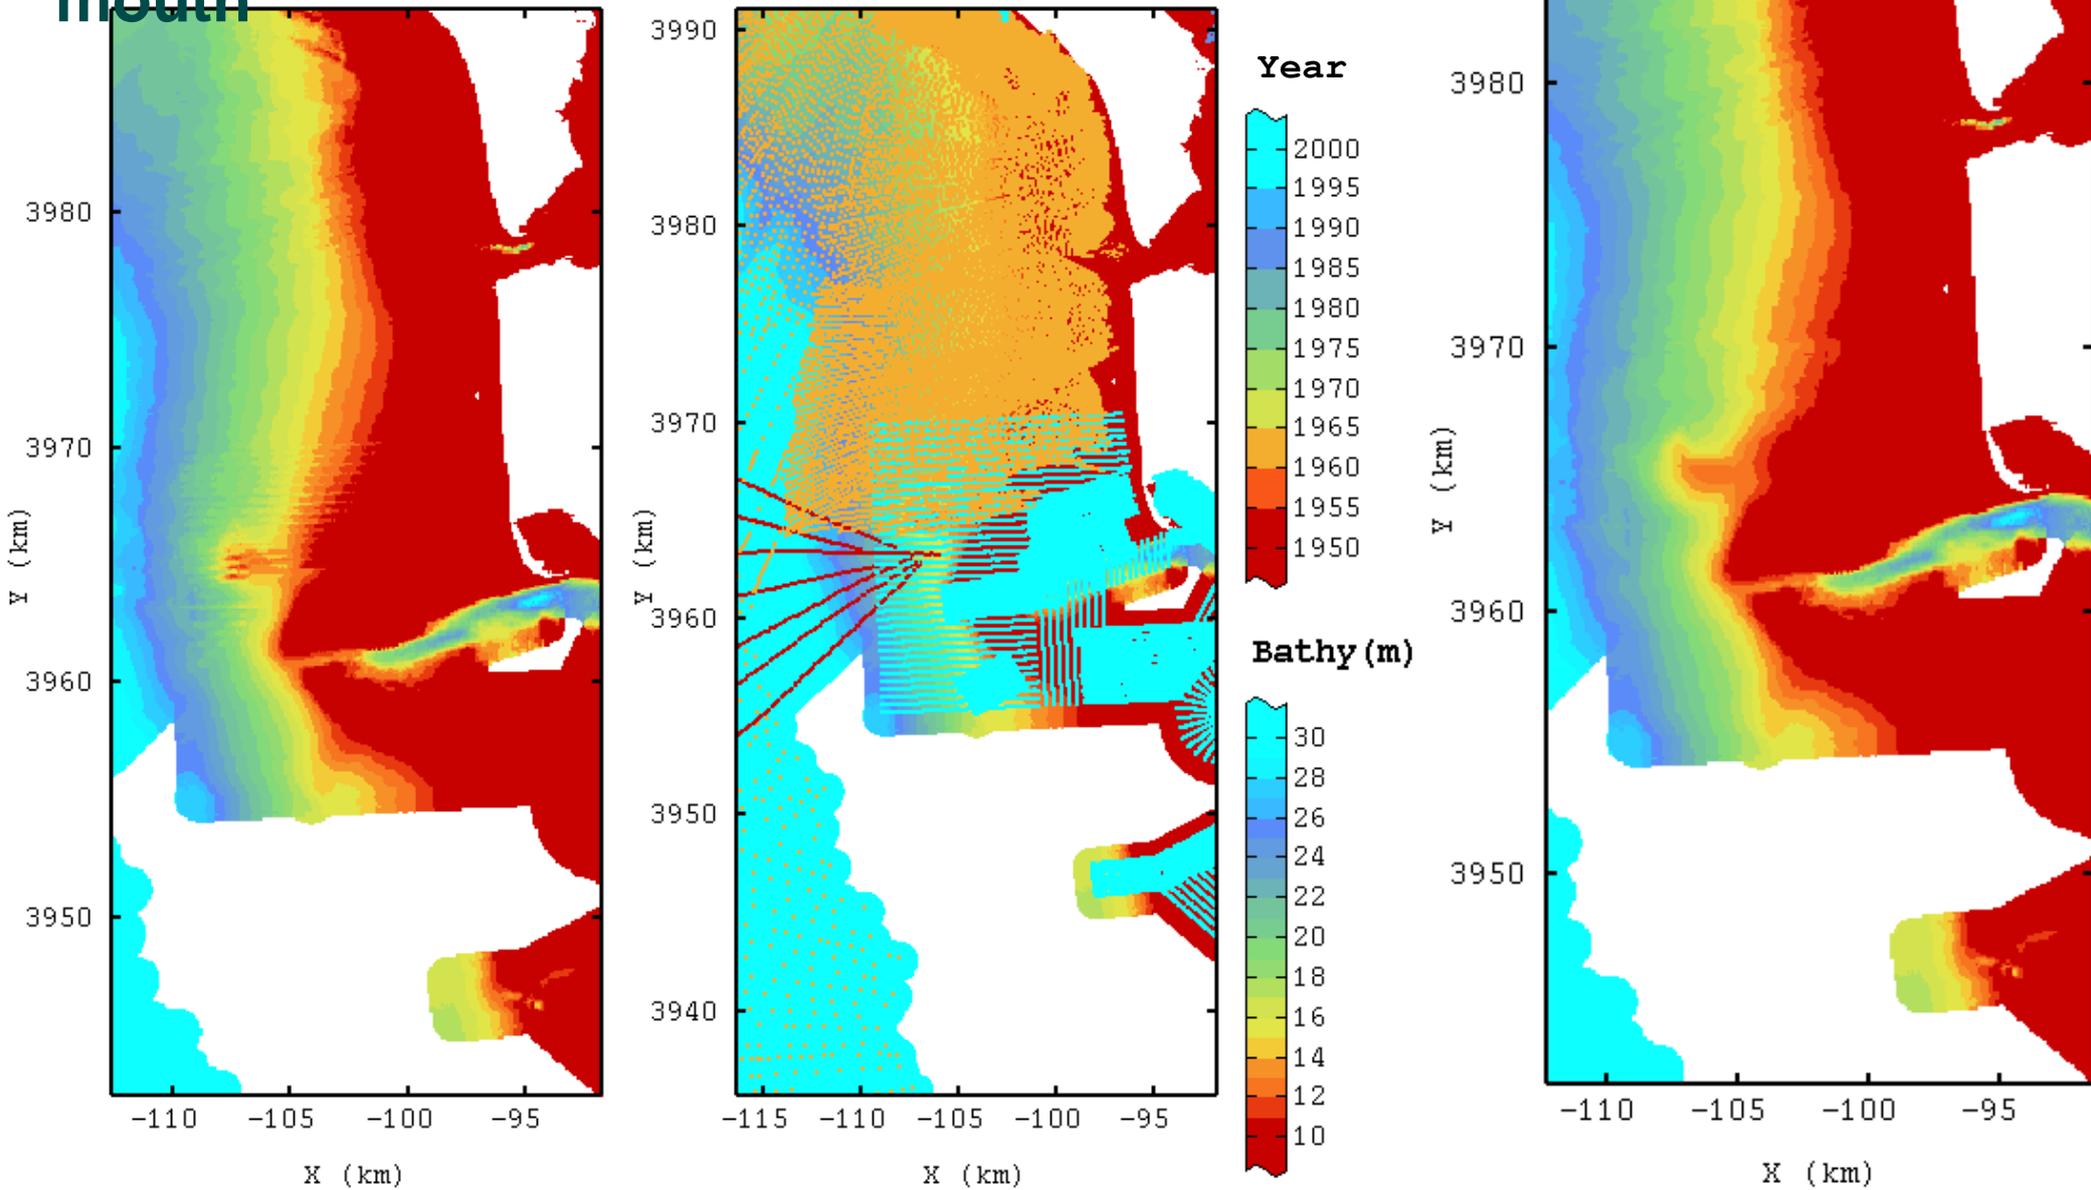

Overview of by-products


- Aim: improve the product qualification
- By-products:
 - DTM uncertainty (quality) ⇐
 - Acquisition year ⇐
 - Interpolation method
 - Producer / provider organization
 - Survey number
- Outcome:
 - These products allow advanced data qualification and are currently transposed to other applications
 - Full automation of the entire procedure



Methodology

- **DTM uncertainty**




- Kriging standard deviation
- Unique variogram model (stationary assumption) \Rightarrow same order of magnitude wherever we are (smooth vs. highly variable areas)
- Alternative: locally weight the kriging standard deviation according to the local variability of bathymetry

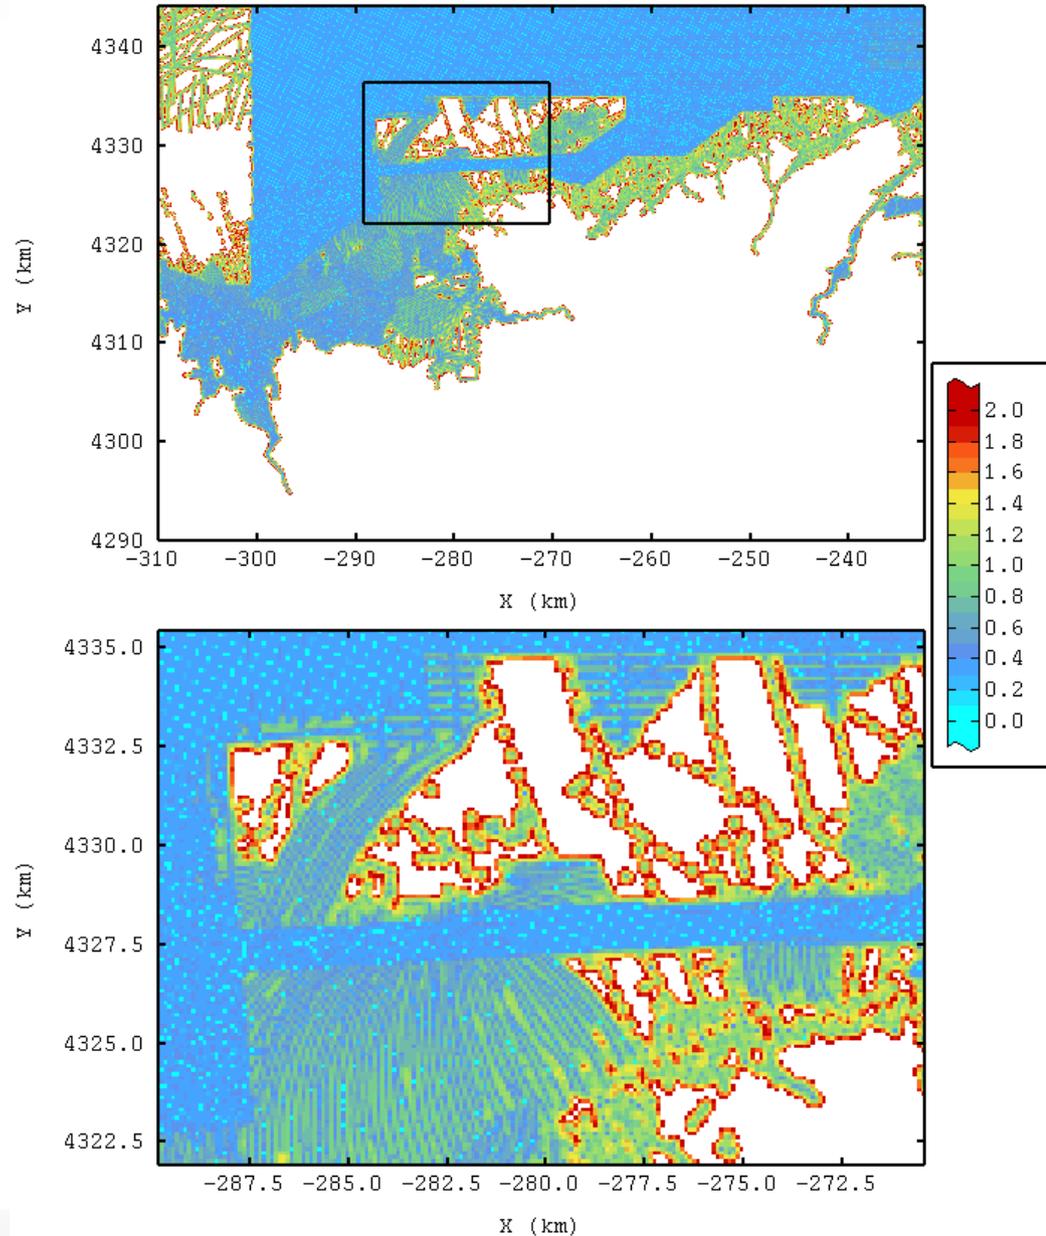

Methodology

- DTM uncertainty

Local $\sigma^2 \rightarrow$

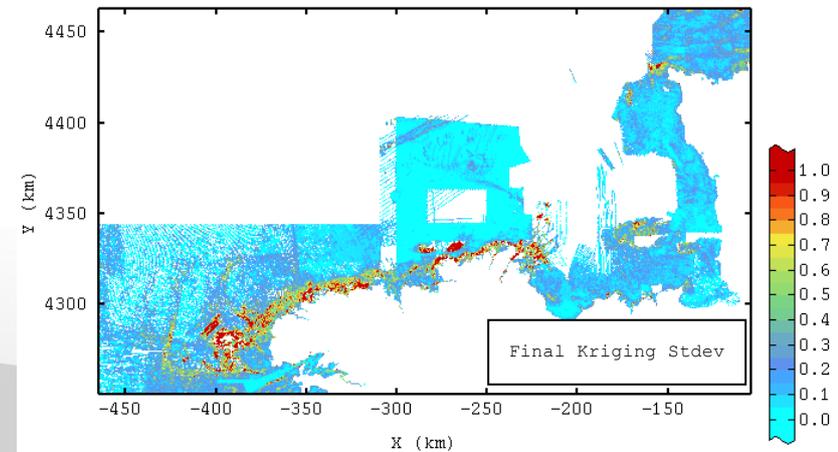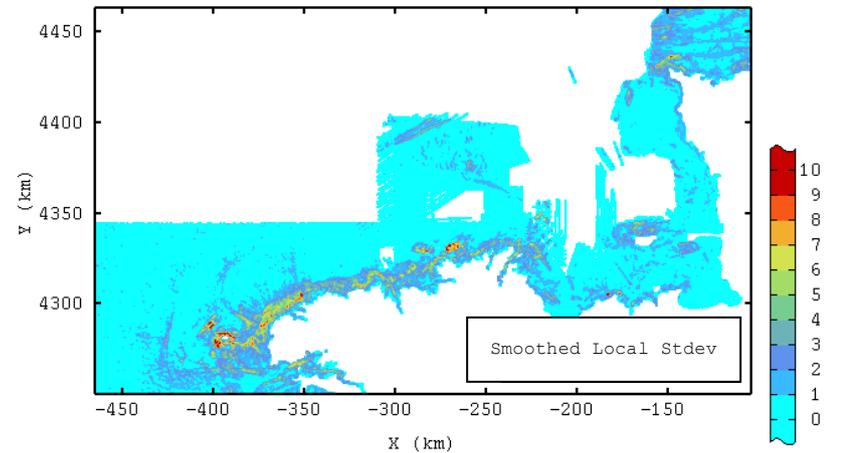
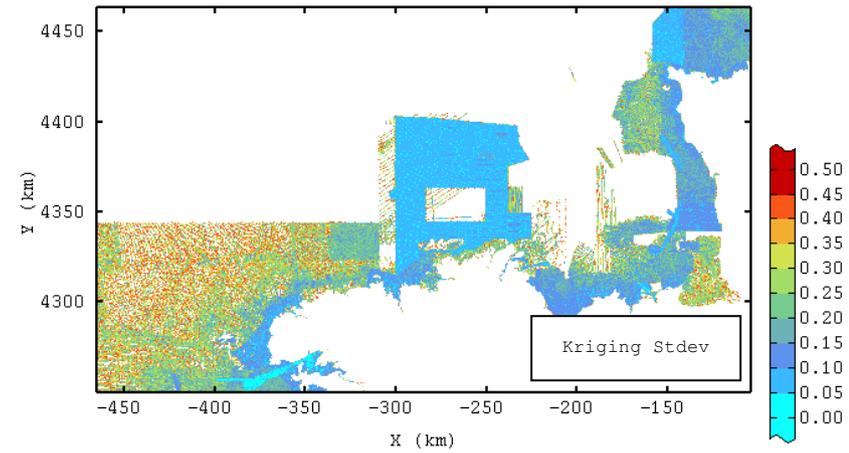


Geovariances
Where no one has gone before

Methodology

• Acquisition year

- Computation of local statistics about the age
- Acquisition year: average year, standard deviation, minimum, maximum, Difference max-min

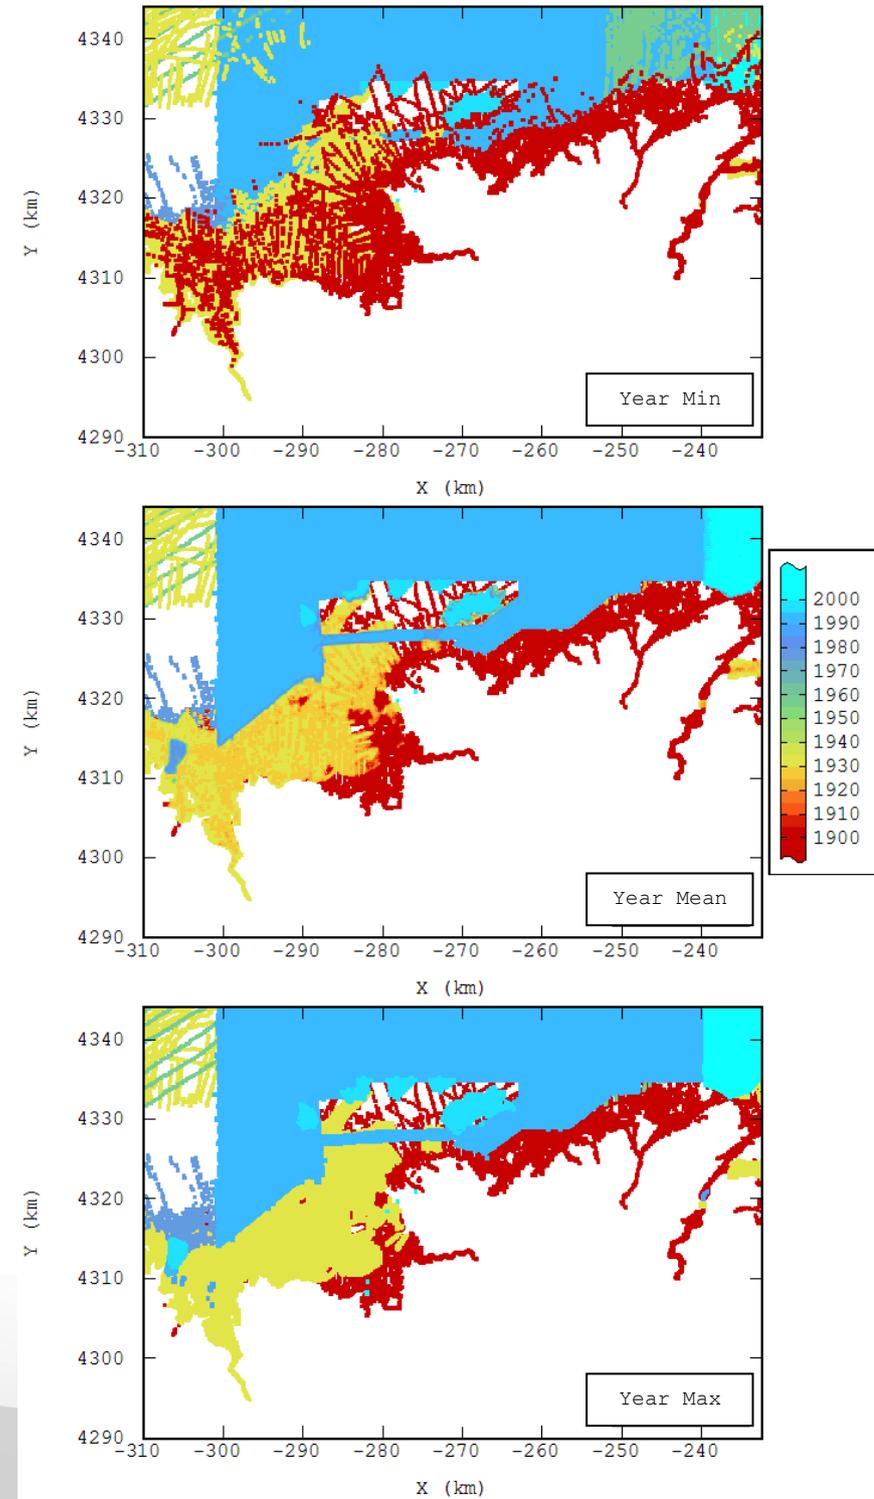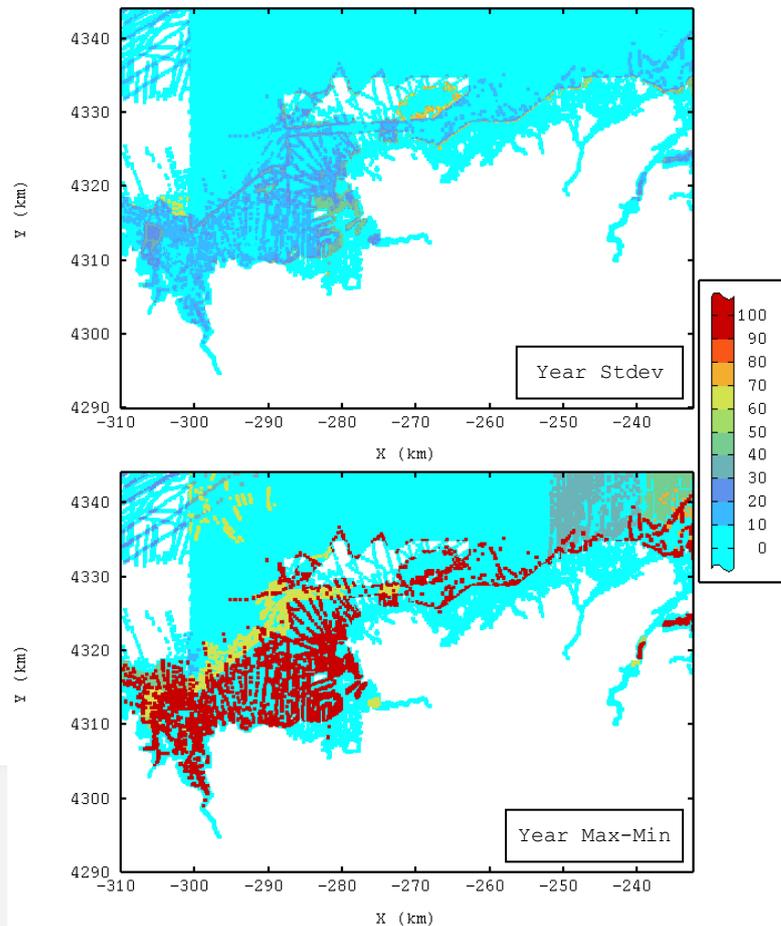

Conclusions and Perspectives

- **Methodological outcomes**

- Application of classical geostatistical algorithms
- Fulfilment of objectives in terms of spatial resolution, uncertainty and age description
- Full automation of the modeling procedure, from data import to DTM export of results
- Difficulties to identify abnormal profiles on some surveys (ex: MSM)

- **Perspectives**


- Mediterranean sea and Corsica
- Regular update of models in order to integrate newly acquired data
- « Moving-Geostatistics » methodology, jointly developed with the company Estimages, to account for local bathymetry characteristics



Questions

- Test tiles for the choice of the interpolation model

Tile 18090

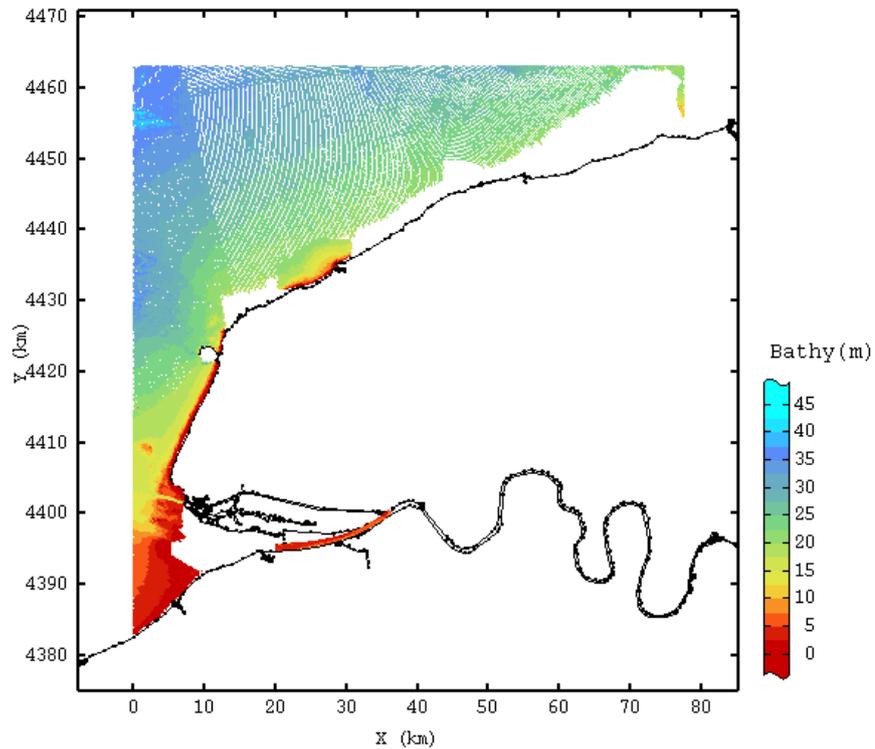

Tile 14583

